



aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



IQAN-MDL2 **Display Modules**

Electronic Control Systems



ENGINEERING YOUR SUCCESS.

Application

The IQAN-MDL2 is a central unit that works with a variety of expansion modules in an IQAN control system. The IQAN-MDL2 works as a master, displays information, provides a data gateway and has a variety of flexible I/O channels.

The IQAN-MDL2 is intended for the in-cab environment and will display vehicle data and system information. In most applications the display will replace all mechanical dial type instruments.

The IQAN-MDL2 has multiple inputs and outputs for measurement and control of hydraulic systems. The different input types are voltage, on/off, directional frequency (quadrature) and frequency. The outputs are proportional and on/off. The unit also has 4 CAN interfaces, all of which are user configurable.

The IQAN-MDL2 has a large internal memory for events and logging that is power fail-safe protected.

Design and function

The IQAN-MDL2 has a 6.5" transfective TFT color display.

The IQAN-MDL2 has two (2) *proportional outputs* that can be configured as current mode (current closed-loop) or PWM mode (voltage open-loop) signals. These outputs can control two bi-directional valve sections or two single solenoid devices (ie. proportional cartridge valves). The parameters are configured using IQAN software. For flexibility these outputs may also be configured as up to two (2) *on-off outputs* and up to four (4) *on-off inputs*.

The unit also has six (6) *on-off outputs* that are high-side power outputs. The high-side outputs may not be configured as proportional.

The IQAN-MDL2 has eight (8) *voltage inputs* to accept 0-5V signals from input devices or sensors. These inputs can also be set up as *on-off inputs*. There are four (4) digital *on-off inputs* for switches. The digital inputs may be configured to accept one frequency or one directional frequency (quadrature) input.

The IQAN-MDL2 is connected to other units by four CAN buses. All CAN buses may be configured as ICP (IQAN CAN Protocol), SAE J1939 or Generic CAN (user defined). The unit supports RS232 for external modem, IQAN-GA connection and USB, RS232 or CAN for communication with a PC.

The IQAN-MDL2 is made using selected components and conforms to strict international requirements.

General

Weight	0.9 Kg
Temperature range	
Operating, ambient (no external loads, backlight off)	-30 to +70 °C
Storage, ambient	-40 to +80 °C
Protection	in-cab use
Voltage supply	11- 32 Vdc
Current consumption (idle, backlight on, outputs off)	320 mA (28 Vdc) 580 mA (14 Vdc)

Performance

Processor	32-bit (144 MHz)
Logging	16Mbyte flash
Sample time	Min 10 ms
Software tools	IQANdesign family

Outputs

Proportional outputs ¹	2 double
Type current mode	current - closed-loop
PWM mode	voltage - open-loop
Signal range	100 - 2000 mA
Dither frequency	25 - 333 Hz
Resolution	1 mA
Digital outputs	
Type	high side switch
Max load	2 A

Inputs

Voltage inputs ²	8
Signal range	0 - 5 Vdc
Resolution	5 mV
Frequency inputs ³	1
Signal range (speed mode)	2 - 30000 Hz
(position mode)	0 - 30000 Hz
Directional frequency inputs ³	1
Signal range (speed mode)	2 - 30000 Hz
(position mode)	0 - 30000 Hz
Digital inputs	4 (16)
DIN-A thru -D ³ , DIN-M thru -P ¹	
Signal high	>2 Vdc
Signal low	<0.8 Vdc
DIN-E thru -L ²	
Signal high	>3 Vdc
Signal low	<2.5 Vdc

1) The proportional outputs and digital inputs share the same physical pins. The user defines the channels/pins with IQANdesign.

2) The voltage inputs and digital inputs share the same physical pins. The user defines the channels/pins with IQANdesign.

3) The frequency and digital inputs share the same physical pins. The user defines the channels/pins with IQANdesign.

Ordering part numbers

IQAN-MDL2	20075847
-----------	----------

Communication interfaces

CAN (ISO 11898)	4
Protocols	ICP, SAE J1939, Generic (user defined)
RS-232	2 (1 each in C1 and C2 connectors)
Protocols	AT-Hayes,GSM07.07, GSM07.05, IDP
USB 2.0 (full speed)	1

Environmental Protection¹

EMI

ISO 14982:1998, Radiated emission
 EN 55025:2003, Conducted emission (CISPR 25)
 ISO 11452-2:1998, Radiated Susceptibility
 ISO 11452-4:1998, Conducted Susceptibility
 ISO 7637-2:2004, Transient susceptibility on power
 ISO 7637-3:2007, Transient susceptibility on signal

ESD

ISO 10605:2001, Handling

Mechanical environment

IEC 60068-2-64:1993 Fh, Random vibration
 IEC 60068-2-29:1987 Eb, Bump


Climate environment

IEC 60529:2001, Enclosure protection (IPx3)
 IEC 60068-2-1:1990 Ab, cold
 IEC 60068-2-2:1974 Bb, heat
 IEC 60068-2-30:1985 Db, Damp heat cyclic
 IEC 60068-2-78:2001, Damp heat, steady state

Chemical environment

IEC 60068-2-52:1996 Kb (salt mist, cyclic)

1) Please refer to Instruction book HY17-8401-IB/UK for more information

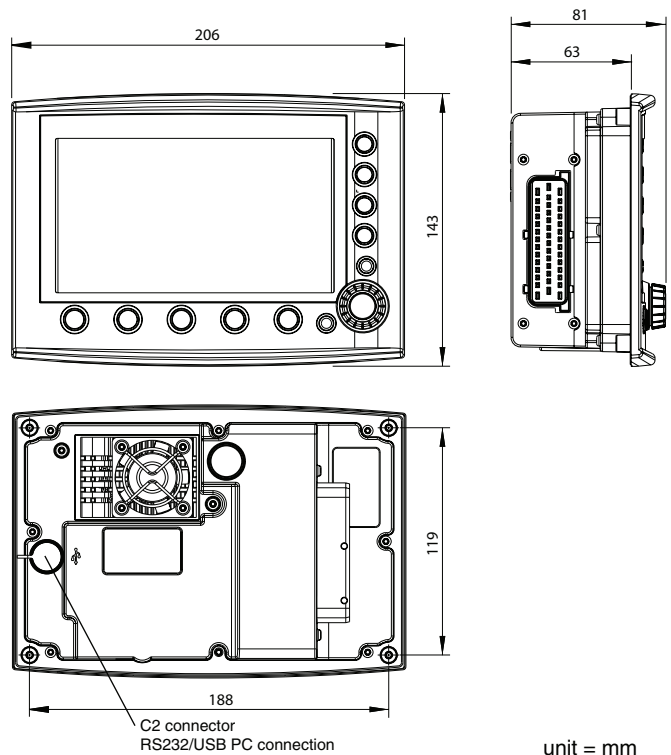

! WARNING

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application, including consequences of any failure, and review the information concerning the product or system in the current product catalogue. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

Offer of Sale

Please contact your Parker representation for a detailed "Offer of Sale".

Parker Worldwide

AE – UAE, Dubai
Tel: +971 4 8875600
parker.me@parker.com

AR – Argentina, Buenos Aires
Tel: +54 3327 44 4129

AT – Austria, Wiener Neustadt
Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener Neustadt
Tel: +43 (0)2622 23501 970
parker.easteurope@parker.com

AU – Australia, Castle Hill
Tel: +61 (0)2-9634 7777

AZ – Azerbaijan, Baku
Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles
Tel: +32 (0)67 280 900
parker.belgium@parker.com

BR – Brazil, Cachoeirinha RS
Tel: +55 51 3470 9144

BY – Belarus, Minsk
Tel: +375 17 209 9399
parker.belarus@parker.com

CA – Canada, Milton, Ontario
Tel: +1 905 693 3000

CH – Switzerland, Etoy
Tel: +41 (0) 21 821 02 30
parker.switzerland@parker.com

CN – China, Shanghai
Tel: +86 21 5031 2525

CZ – Czech Republic, Klecany
Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst
Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup
Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid
Tel: +34 902 33 00 01
parker.spain@parker.com

FI – Finland, Vantaa
Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve
Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens
Tel: +30 210 933 6450
parker.greece@parker.com

HK – Hong Kong
Tel: +852 2428 8008

HU – Hungary, Budapest
Tel: +36 1 220 4155
parker.hungary@parker.com

IE – Ireland, Dublin
Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IN – India, Mumbai
Tel: +91 22 6513 7081-85

IT – Italy, Corsico (MI)
Tel: +39 02 45 19 21
parker.italy@parker.com

JP – Japan, Fujisawa
Tel: +(81) 4 6635 3050

KR – South Korea, Seoul
Tel: +82 2 559 0400

KZ – Kazakhstan, Almaty
Tel: +7 7272 505 800
parker.easteurope@parker.com

LV – Latvia, Riga
Tel: +371 6 745 2601
parker.latvia@parker.com

MX – Mexico, Apodaca
Tel: +52 81 8156 6000

MY – Malaysia, Subang Jaya
Tel: +60 3 5638 1476

NL – The Netherlands, Oldenzaal
Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Ski
Tel: +47 64 91 10 00
parker.norway@parker.com

NZ – New Zealand, Mt Wellington
Tel: +64 9 574 1744

PL – Poland, Warsaw
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal, Leca da Palmeira
Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest
Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow
Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga
Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SG – Singapore
Tel: +65 6887 6300

SK – Slovakia, Banská Bystrica
Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto
Tel: +386 7 337 6650
parker.slovenia@parker.com

TH – Thailand, Bangkok
Tel: +662 717 8140

TR – Turkey, Istanbul
Tel: +90 216 4997081
parker.turkey@parker.com

TW – Taiwan, Taipei
Tel: +886 2 2298 8987

UA – Ukraine, Kiev
Tel: +380 44 494 2731
parker.ukraine@parker.com

UK – United Kingdom, Warwick
Tel: +44 (0)1926 317 878
parker.uk@parker.com

US – USA, Cleveland (industrial)
Tel: +1 216 896 3000

US – USA, Lincolnshire (mobile)
Tel: +1 847 821 1500

VE – Venezuela, Caracas
Tel: +58 212 238 5422

ZA – South Africa, Kempton Park
Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

European Product Information Centre
Free phone: 00 800 27 27 5374
(from AT, BE, CH, CZ, DE, EE, ES, FI, FR, IE, IT, PT, SE, SK, UK)

US Product Information Center
Free phone: 1-800-272-7537
www.parker.com

